

LINOLEUM

LINO

designed by nature



NATURAL

THE NATURAL CHOICE FOR PEOPLE AND THE ENVIRONMENT

Tarkett's Lino is made from the same original recipe since 1898 and yet it continues to be a modern, versatile and sustainable flooring, made of natural and renewable ingredients such as linseed oil, pine rosin, wood and cork flour and jute. Our Cradle to Cradle® approach ensures we design our products to positively contribute to the environment and people's well-being at each step of the product's life, while supporting the transition to a circular economy business model.

We put in place a number of initiatives to achieve our ambition of a zero-emission site at Narni. To ensure a more responsible use of natural resources, we've installed systems such as heat exchangers that recover and reuse heat from ovens, a biomass boiler that produces hot water to heat the ovens and a closed-loop water system. These have helped us establish a more sustainable manufacturing approach and minimise our impact on the environment.



GOOD MATERIALS

You care about choosing a flooring made from natural and high quality ingredients?

In making linoleum, we use materials that contribute positively to people's health and the environment. Closed-loop design starts here, so that good materials become future resources that can be reused or returned to nature as biodegradable ingredients

- **94% natural raw materials** - linseed oil, pine rosin, wood and cork flour, calcium carbonate and jute.
- **78% from abundant renewable resources** - including local suppliers. We support local linen producers to reduce our carbon footprint.
- **100% of ingredients have been positively assessed** according to Cradle to Cradle® framework for health and environment. As such Tarkett's Lino exceeds European REACH regulation requirements.
- **100% recyclable** - Tarkett's Lino offcuts can be fully reused as raw materials for future products or packaging through our ReStart® Programme.



RESOURCE STEWARDSHIP

You want a linoleum produced in a responsible way?

Driven by the standards of our World Class Manufacturing programme for continuous improvement of processes, we reduce our operational impact and preserve the environment.

- **Pioneering the new ISO14067 product carbon footprint certification**, in addition to existing ISO9001 quality, ISO14001 environment, ISO50001 energy and OHSAS 18001 safety management certification.
- **100% recycled /recirculated industrial water (closed-loop).**
- **Rainwater collection and re-use.**
- **Green House Gases (GHG) emission reduction by 44% vs 2010** (the equivalent of a 23.541 km car journey).
- **Producing electricity, heating and cooling power from a single device** (a gas engine) to increase energy efficiency in a profitable and sustainable way (30% self-produced energy).
- **Increasing renewable energy use** through photovoltaic panels, a biomass boiler and a geothermal system (internal production) and the purchase of 100% renewable electricity.



NATURAL



PEOPLE-FRIENDLY SPACES

You care about the comfort and well-being of users?

We create flooring designed for improved indoor air quality that respects people's health and well-being. Tarkett's Lino enhances people's everyday sensorial experience, through colours and patterns, as well as through acoustic or underfoot comfort. All of which offer key advantages for schools, universities and hospitals.

- Research on how to best use colour and design to enhance aesthetics and ergonomics for stimulating, productive or restful environments.
- Innovation for a better sound and thermal insulation, and for improved underfoot comfort.
- Good air quality: VOC emissions ($<100\mu\text{g}/\text{m}^3$) 10 times lower than the most stringent industry requirements.
- Naturally phthalate-free.
- Natural bactericidal qualities.
- **Hardwearing and resistant**, Tarkett's Lino xf²™ surface treatment simplifies cleaning and maintenance, which means 3.7% less water usage, 8.9% less electricity and 25% less detergent*.

*Compared to linoleum without xf2.



REUSE

You want to play a role in ensuring a sustainable future?

We recycle at every step of the linoleum life cycle to upcycle waste and avoid landfill. We believe products should no longer have an end of life, but an end of use to then become resources for new products. Join us in the transformation towards a circular economy.

- Tarkett's Lino is 100% recyclable, from linoleum paste and surplus jute to powders.
- By recycling 1,600 tons of linoleum annually, we reduce our need for virgin raw materials.
- Our dedicated ReStart® recycling programme helps customers worldwide to collect and recycle installation offcuts.
- Our objective is 0% production waste by 2020 at Narni.



DESIGN

Natural, versatile and sustainable, combining tradition, craftsmanship and innovation, Tarkett's Lino offers a fresh approach to the flooring needs of today and lifestyles of tomorrow.

OPEN TO A WORLD OF COLOUR

Drawing on on-going trends analysis and colour expertise, our ranges have been developed through consultation with architects across the world at every design phase. It has enabled Tarkett to perfect the right combination of colour, balance and structure for each design concept, meeting the ambitions of any architectural project.

To anticipate how needs will change, our design teams explore emerging architectural, cultural and lifestyle trends. We share these insights in our Tarkett Observer studies that identify key orientations to enhance interior building design and user experience in healthcare, education and retail environments of the future.

Tarkett's Lino now comes in a complete solution that goes through the ages and is more contemporary than ever. From the floor to the wall, whether you need a compact, acoustic or conductive option, a variety of design patterns and colours opens up to you.



FLOORCRAFT AND CUSTOMISATION SERVICE

For projects looking for a more individually customised design or colour, Tarkett offers a dedicated customisation service, ready to translate your ideas into unique flooring concepts.



OUR DESIGN ORIENTATIONS

Human Inside

- Creating social cohesion for a stimulating environment that improves focus and concentration.
- An environment that plays with graphic and colour codes to give meaning to each area.

Interactive Space

- Flexible and modular design to change perceptions of learning and stimulate creativity.
- Tonic and bright colour range with materials and patterns that bring the present into the future.

Green value

- Creating a first contact with eco-responsibility and integrating environmental awareness.
- Greens, browns and neutrals and patterns that suggest nature. Re-usability and recyclability.

DESIGN - OUR RANGE

Veneto

A collection of strong and subtle marbled designs in soft or intense pattern variations for a timeless effect. All shades of the colour spectrum in a combination of neutral and contemporary accents.

Grands Classiques: a selection of 20 timeless colours amongst the Veneto that we guarantee in production until 2033. They are available in different levels of traffic resistance with x²™ surface treatment, and can be matched with our range of multicolour welding rods for a perfect finish. This includes Sicuro R10 anti-slip and Essenza non-permanent surface finish. Grands Classiques designs are also available in acoustic option: Silencio - 18dB.



Style Emme and Style Elle

A design range where the natural patterned beauty of linoleum meets modern style. It's a subtle mix between contemporary colours and light marbled surfaces.

- **STYLE EMME** a subtle marbling for refined and sophisticated styling.
- **STYLE ELLE** a discrete directional linear design.



Etrusco

A contemporary linoleum range featuring sixteen deep and radiant colours.

Thanks to its deep colours and plain design, Etrusco can be easily combined with any other type of pattern or used alone, for great design effects.



Trentino

A collection mixing modernity and tradition, Trentino offers a subtle semi-directional pattern, made of 3 colours : a main marbled colour, with two contrasting tones, giving the design depth.




Originale

The only linoleum Cradle to Cradle® Gold certified.

The real nature of Tarkett's lino: authenticity, product essence, sustainability. This new collection features 2 striking designs, Minerale and Vegetale, where vegetal pigments give authentic colours.

- **MINERALE:** a marbled soft design with a warm linoleum effect
- **VEGETALE:** a linear design close to the plant aspects, like leaf fibres.

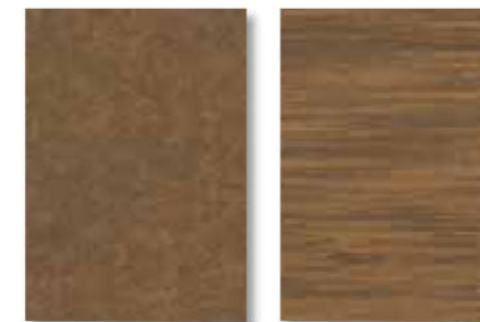

LinoWall

The only linoleum approved for use on walls and featuring Bs2-d0 fire certification, LinoWall opens up a world of co-ordinated design possibilities. Three pastel colours have been specially chosen to complement the palette of our floor collection, while three neutral shades provide a direct match between wall and floor.



Besides its technical performances, one of the greatest strengths of Tarkett's Lino is its rich colour palette. All colours of the chromatic circle are present in the range, offering unlimited options for mix and match, and fitting every ambiance.

Our fresh, distinctive linoleum collection blends design and colour to create contemporary looks that are right on-trend, with the accessories you need for a perfect finish. The range consists of the Veneto, Style Elle, Style Emme and Etrusco designs, to which we've added two newcomers, Trentino - a subtle pattern whose two contrasting tones give the design depth - and Originale - Cradle to Cradle™ Gold level certification. And we don't stop at floor- level. Our new wall-approved LinoWall is another first, it offers co-ordinated interiors from the ground up.

All of our linoleum flooring and wall covering come with the xf² surface-treatment technology for excellent resistance and easy maintenance, ideal in heavy traffic environments. The Veneto and the Originale ranges are also available with a factory-applied, non-permanent finish called Essenza.

★ 20 Grands Classiques







Linoleum Flooring











COMPACT	2mm xf ²	2	Veneto	14871	---
	2.5mm xf ²	2.5	Veneto	14872	---
		2.5	Style Elle	14825	---
		2.5	Style Emme	14835	---
		2.5	Etrusco	14877	---
		2.5	Trentino	14502	---
	2.5mm Essenza	E	Veneto	1805	---
		E	Originale Minerale	14042	---
		E	Originale Vegetale	14032	---
	3.2mm xf ²	3.2	Veneto	14873	---
ACOUSTIC	3.8mm xf ²	S	Veneto Silencio	14892	---
		S	Style Elle Silencio	14783	---
		S	Style Emme Silencio	14782	---
		S	Etrusco Silencio	14894	---
		S	Trentino Silencio	14124	---
4.4mm xf ²	AC	Veneto Acoustic Cork	14881	---	
TECHNICAL SOLUTIONS	2.5mm xf ²	SD	Linoleum Static Dissipative	14995	---
		C	Linoleum Conductive	14991	---
		R10	Veneto Sicuro	1863	---
		B _s	Veneto B _s	14898	---
		B _s	Etrusco B _s	14078	---
		B _s	Style Emme B _s	14088	---
		B _s	Style Elle B _s	14098	---
		B _s	Trentino B _s	14128	---

Linoleum Wall

2mm xf ²	LinoWall	14010	---
---------------------	----------	-------	-----

--- Colour code □ on request

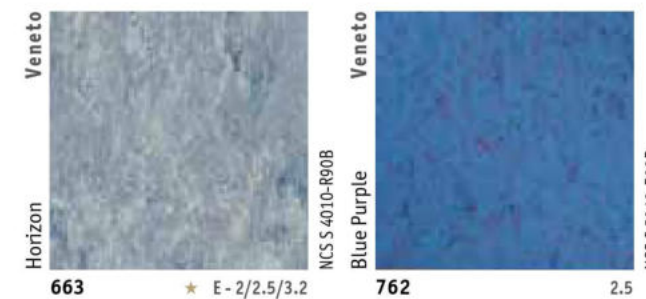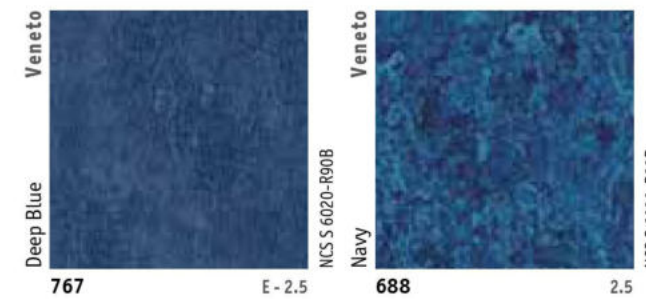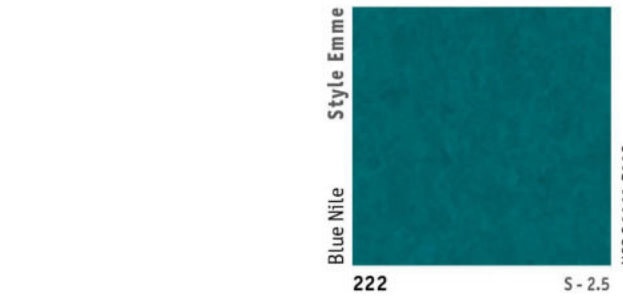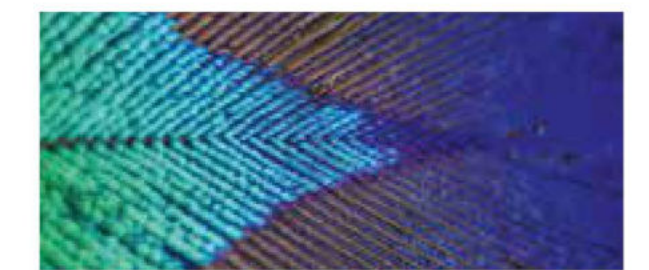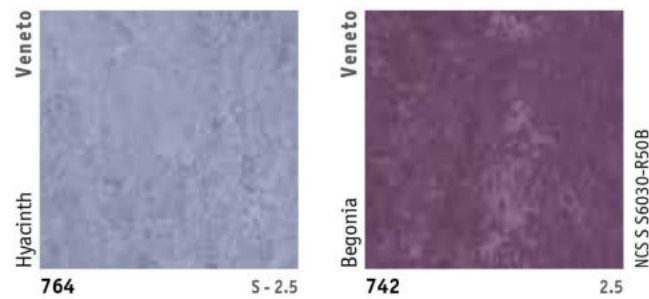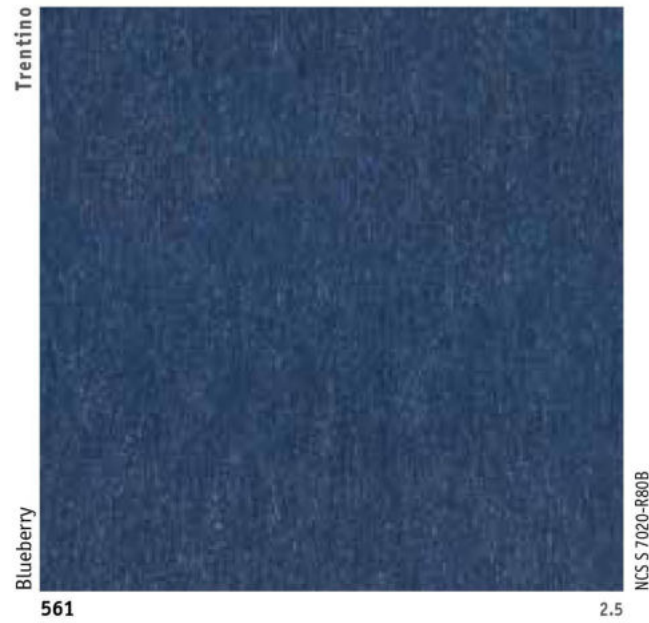

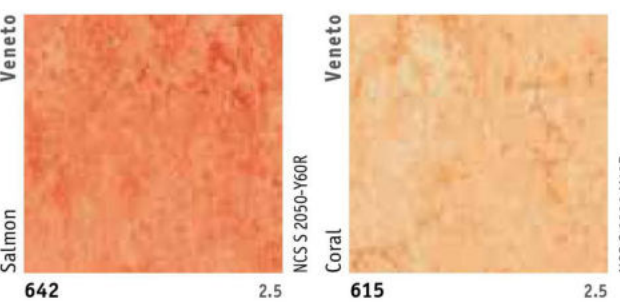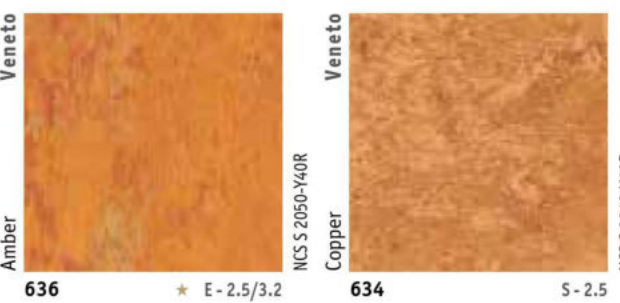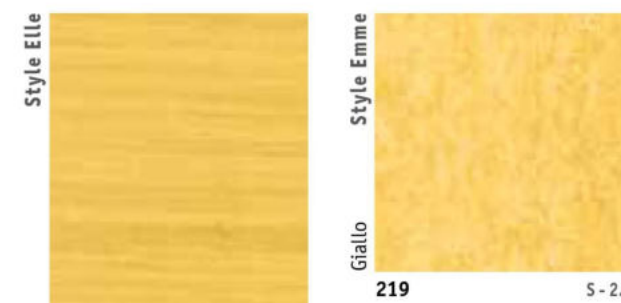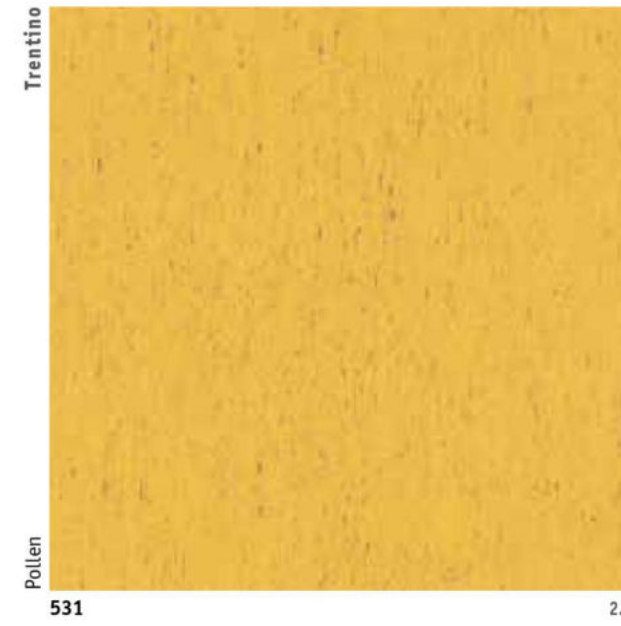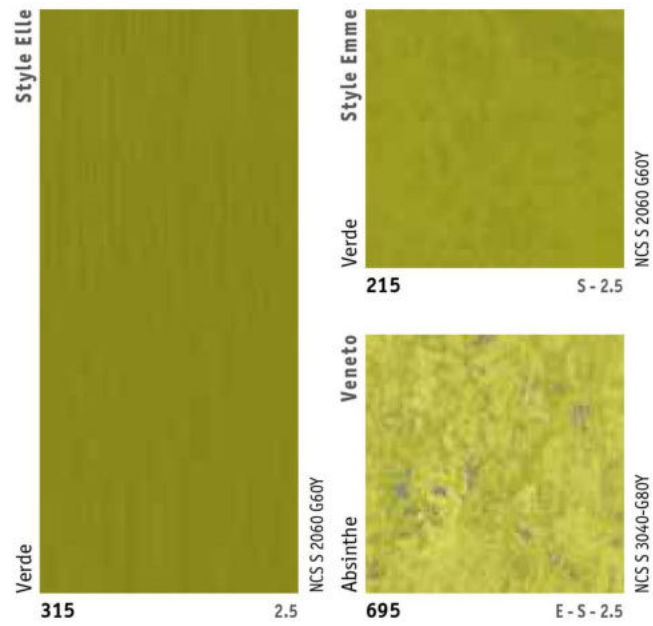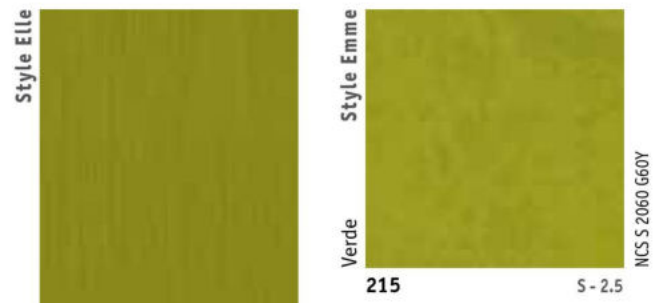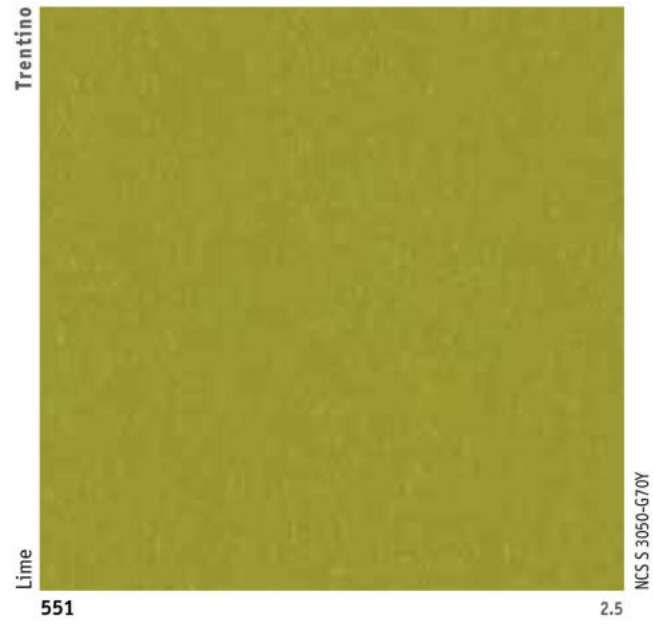



LINOLEUM xf²

Trentino			Veneto			Veneto								
Grapefruit			Chocolate	Tiger Eye										
530	632	524	NCS S 1060-Y80R	NCS S 7005-Y80R			NCS S 7020-Y40R	s - 2.5	2.5					
Etrusco			Macaw			Etrusco								
044			Red Berlin			094			NCS S 3060-Y80R	NCS S 6030-Y90R	2.5	2.5		
Jaipur Pink	Style Emme	Cranberry	Style Emme			Etrusco								
221	223	223	223			NCS S 1060-Y80R			NCS S 1070-R	NCS S 2070-Y90R	2.5			
Terracotta			Veneto			Veneto								
641			Raspberry			945			740	Crimson	645	NCS S 2070-Y80R	NCS S 4040-Y90R	NCS S 3060-R

LINOWALL

The only linoleum approved for use on walls and featuring Bs2-d0 fire certification, LinoWall xf² opens up a world of co-ordinated design possibilities.

Three pastel colours have been specially chosen to complement the palette of our floor collection, while three more neutral shades provide a direct match between wall and floor.


Our LinoWall also comes with xf² surface-treatment technology.





ORIGINALE

Originale reflects the desire for a pure, authentic look that's closer to nature. 100% natural in its composition and Cradle to Cradle™ Gold-certified, this is our most sustainable, nature-friendly linoleum flooring to date.

The range includes two new designs, both made using natural pigments derived from renewable organic sources like charcoal and walnut, and available with a factory-applied, non permanent finish called Essenza. Vegetale features a gently marbled linear design resembling plant fibres, enhanced by natural colours.

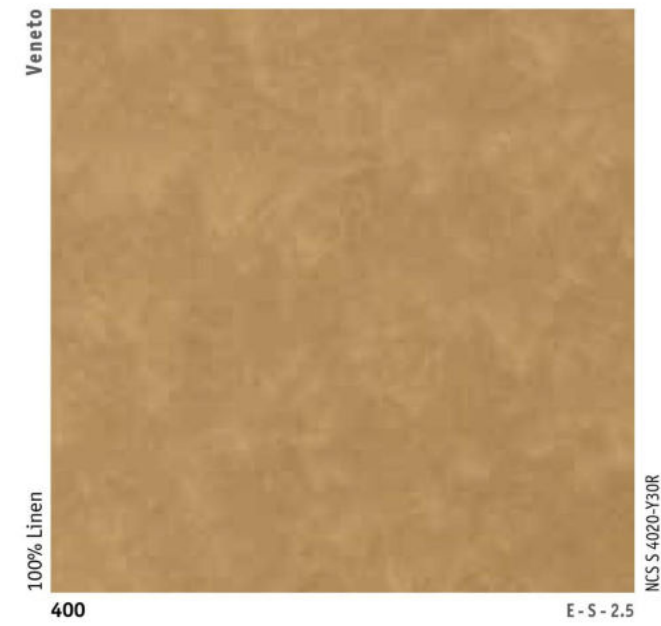

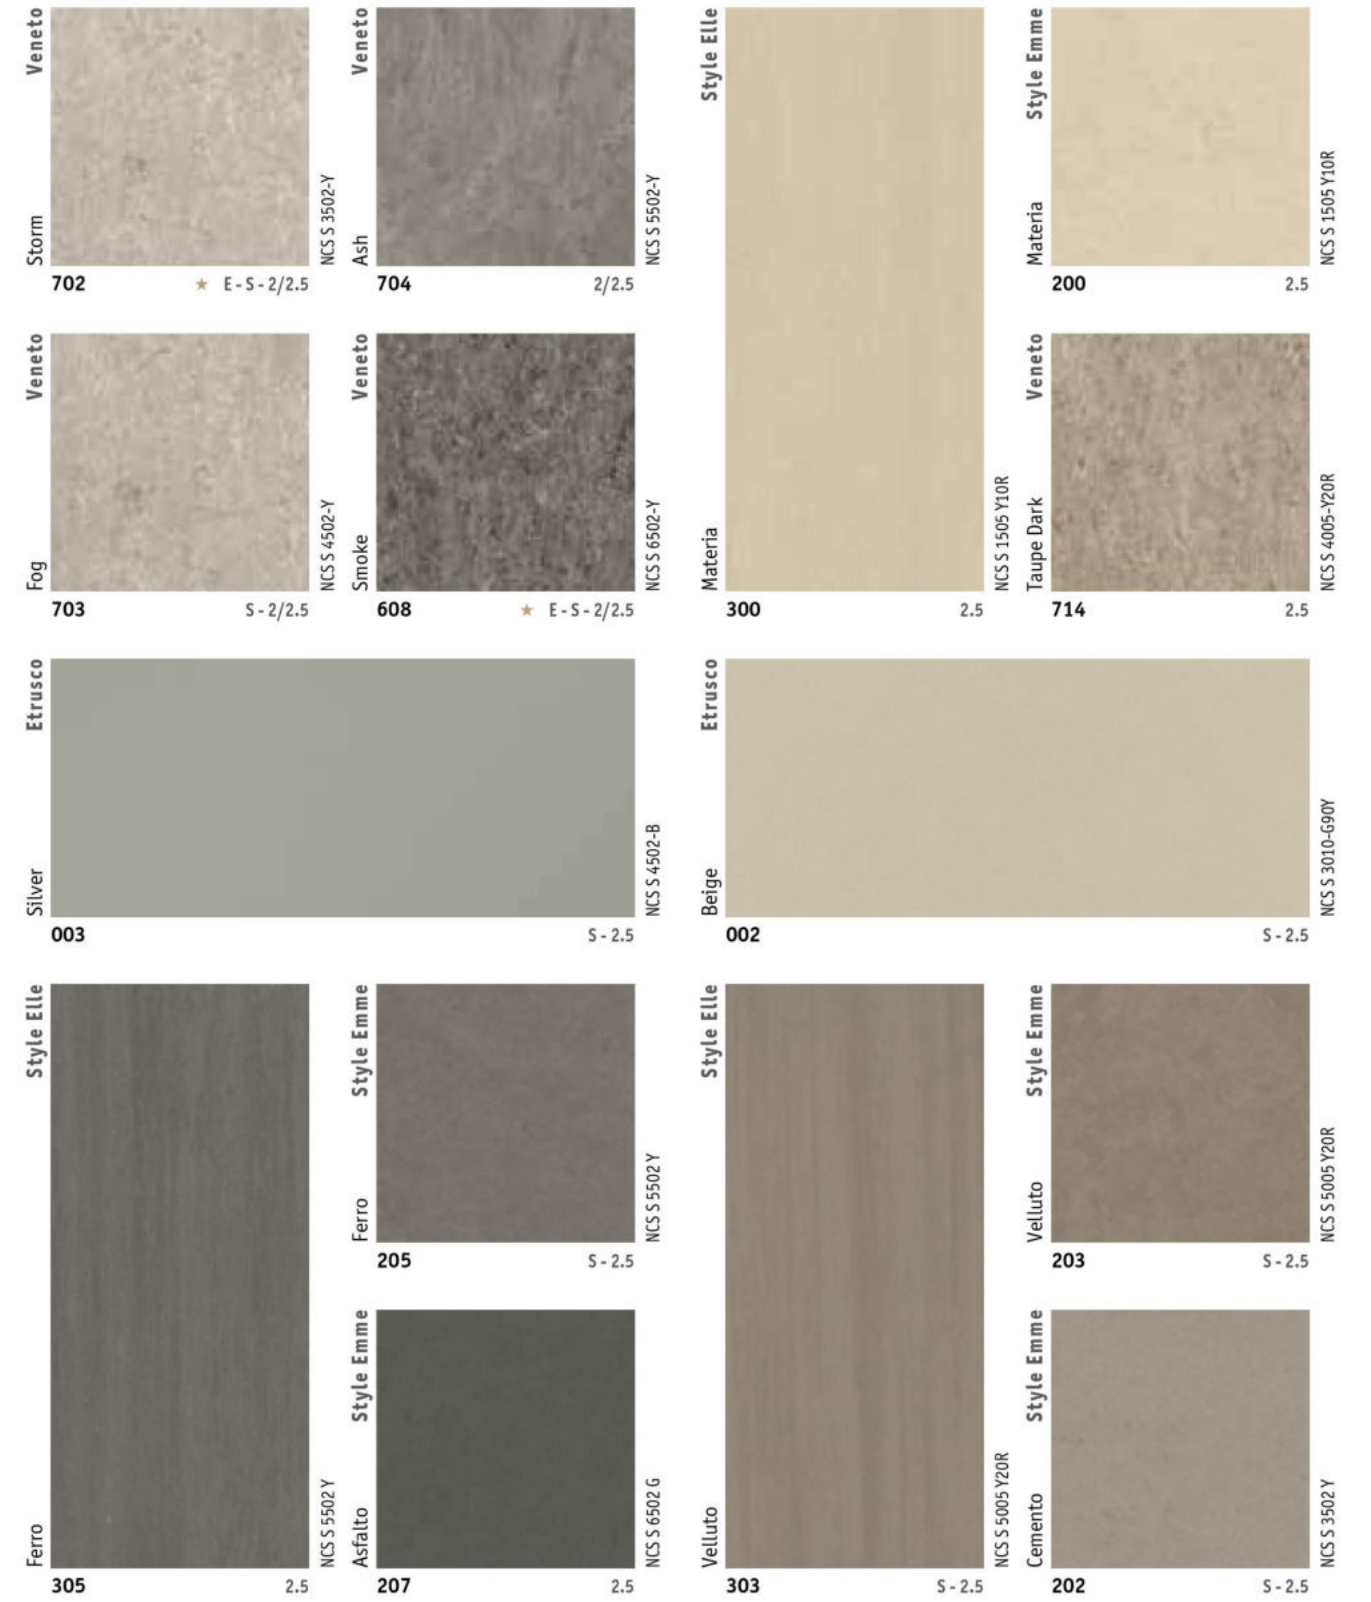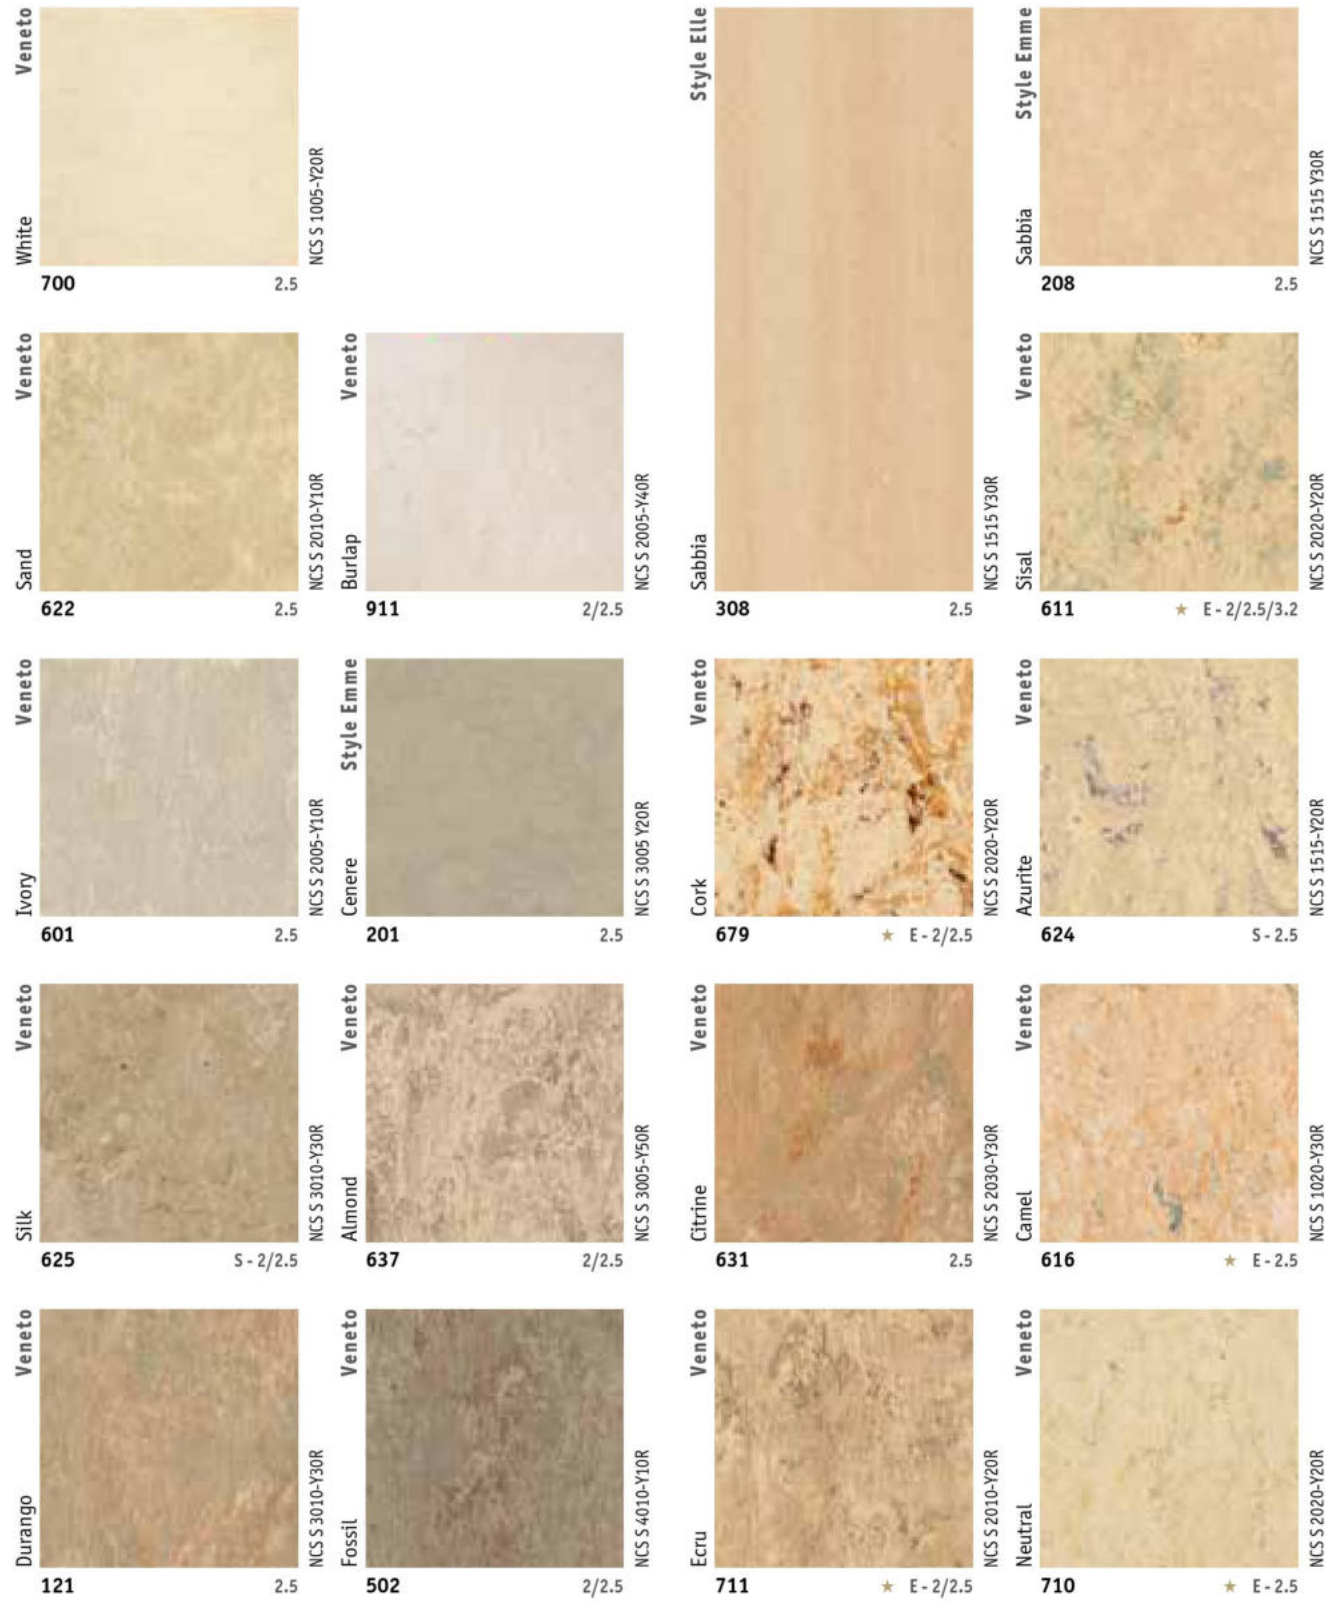



REFERENCES



Veldhoen Gilde, Venray, The Netherlands
6000m² Veneto xF™ 2,0mm, 2,5mm and 3,2mm, 2009

Jean-Louis Etienne School, Herblay, France
3800m² Veneto Silencio xF™, Style Emme Silencio xF™, Etrusco Silencio xF™, 2015



Day Nursery, Eckbolsheim, France
Cabinet DWPA, 800m² Etrusco xF™ 2,5mm, 2011

Sint-Ludgarts School, Merkesm, Belgium
Wollaert, 840 m² Veneto xF™ 2,5mm, 2010

TECHNICAL DATA

CERTIFICATION & CLASSIFICATION	STANDARDS	Veneto x ^{Fi} TM 2 mm	Veneto x ^{Fi} TM Style Emme x ^{Fi} TM Style Elle x ^{Fi} TM Trentino x ^{Fi} TM 2.5 mm	Linoleum x ^{Fi} TM B ₁ 2.5 mm	Originale Essenza Veneto Essenza 2.5mm	Veneto Sicuro x ^{Fi} TM R10 2.5 mm	Etrusco x ^{Fi} TM 2.5 mm	Linoleum Conductive x ^{Fi} TM 2.5 mm	Linoleum SD Static Dissipative x ^{Fi} TM 2.5 mm	Veneto x ^{Fi} TM 3.2 mm
Type of floor covering	ISO 24011 (EN 548)	One single layer calendared linoleum on jute backing.								
CE certification	EN 14041	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Classification	EN ISO 10874 Domestic Commercial Light industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43
TECHNICAL CHARACTERISTICS		STANDARDS								
Surface treatment		x ^{Fi} TM	x ^{Fi} TM	x ^{Fi} TM	Essenza	x ^{Fi} TM	x ^{Fi} TM	x ^{Fi} TM	x ^{Fi} TM	x ^{Fi} TM
Total thickness	EN ISO 24346	2.0 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	3.2 mm
Total weight	EN ISO 23997	ca. 2 400 g/m ²	ca. 3 000 g/m ²	ca. 3 200 g/m ²	ca. 3 000 g/m ²	ca. 3 000 g/m ²	ca. 3 000 g/m ²	ca. 3 000 g/m ²	ca. 3 000 g/m ²	ca. 3 900 g/m ²
Residual indentation	EN ISO 24343-1 Standard requirements Best measured value	≤ 0.15 mm ca. 0.07 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.08 mm	≤ 0.15 mm ca. 0.10 mm
Flexibility	EN ISO 24344 Method A	≤ 25 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 30 mm Ø	≤ 40 mm Ø
Form of delivery	EN ISO 24341	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m	≤ 32 x 2 m
TECHNICAL PERFORMANCES		STANDARDS								
Fire classification	EN 13501-1	C _{fl} s1	C _{fl} s1	B _{fl} s1	C _{fl} s1	C _{fl} s1	C _{fl} s1	C _{fl} s1	C _{fl} s1	C _{fl} s1
Fire effluent toxicity	ISO 5659-2 (evaluation according to EN 45545-2 Annex C)	-	-	-	-	-	-	-	-	-
Impact sound reduction	EN ISO 10140-3 / EN ISO 717-2	5 dB	6 dB	6 dB	6 dB	6 dB	6 dB	6 dB	6 dB	8 dB
Impact sound in the room	NF S31-074	Class C < 85 dB	Class C < 85 dB	Class C < 85 dB	Class C < 85 dB	Class C < 85 dB	Class C < 85 dB	Class C < 85 dB	Class C < 85 dB	Class B < 75 dB
Impact sound reduction with Elafono*	EN ISO 10140-3 EN ISO 717-2	14 dB	14 dB	14 dB	14 dB	14 dB	14 dB	Not applicable	Not applicable	15 dB
Castor chair	EN ISO 4918	Suitable for office chairs with castors type W (Norm EN 12529)								
Static electrical propensity	EN 1815	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV	< 2 kV
Electrical resistance	EN 1081 ESD-approval SP method 2472 EN/IEC 61340-4-	-	-	-	-	-	-	R1 ≤ 10 ⁹ R2 ≤ 10 ⁸ R ≤ 10 ⁸ R ≤ 10 ⁸	R1 ≤ 10 ⁹ R2 ≤ 10 ⁸ 1x10 ⁸ < R < 1x10 ⁹ R ≤ 10 ⁸	-
Impact resistance	EN 259-2	-	-	-	-	-	-	-	-	-
Slip resistance	EN 13893 DIN 51130	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R10	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	DS: ≥ 0.30 R9
Chemical resistance	EN ISO 26987	Resistant to dilute acids, oils, fats, current solvents and alkalis								
Thermal resistance Underfloor heating	EN ISO 10456	0.012 m ² K/W Suitable	0.015 m ² K/W Suitable	0.015 m ² K/W Suitable	0.015 m ² K/W Suitable	0.015 m ² K/W Suitable	0.015 m ² K/W Suitable	0.015 m ² K/W Suitable	0.015 m ² K/W Suitable	0.019 m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Presence of phthalate compounds	CEN ISO/TS 16181	-	-	-	-	-	-	-	-	-
Odor test requirement of emission class M1	EN ISO 16000-28 i.A., VDI 4302	-	-	-	-	-	-	-	-	-
Spongeability, washability and extra washability	EN 12956 EN 233	-	-	-	-	-	-	-	-	-
Determination of antibacterial activity	ISO 22196	Naturally bactericidal (Bacteria mix - EColi and MRSA)								
Colours		19	60 (Veneto) 13 (Style Emme) 7 (Style Elle) 10 (Trentino)	ON REQUEST: 60 (Veneto B) 13 (Style Emme B) 7 (Style Elle B) 16 (Etrusco B) 10 (Trentino B)	29 (Veneto) 3 (Originale Vegetale) 3 (Originale Minerale)	ON REQUEST: 60 (Veneto)	16	1	3	9

Silencio x ^{Fi} TM 3.8 mm	Veneto Acoustic Cork x ^{Fi} TM 4.4 mm	LinoWall 2 mm
-	-	Approved linoleum for walls application
Linoleum on a foam backing	-	-
-	Linoleum on a cork backing	-
Yes	Yes	EN 15102
Classes: 23 33 41	Classes: 23 34 42	Classes: -
x ^{Fi} TM	x ^{Fi} TM	x ^{Fi} TM
3.8 mm	4.4 mm	2.0 mm
ca. 3 450 g/m ²	ca. 4 600 g/m ²	ca. 2 900 g/m ²
≤ 0.30 mm ca. 0.20 mm	≤ 0.40 mm ca. 0.25 mm	-
≤ 30 mm Ø	≤ 30 mm Ø	-
≤ 32 x 2 m or ≤ 32 x 1.95 m (subject to availability-please check upon order)	-	≤ 16 x 2 m
C _{fl} s1	C _{fl} s1	Bs2 d0
-	-	CIQ(4min.) = 0,06 and CIQ(8min.) = 0,09, testing with irradiance of 50 KW/m ² without pilot flame
18 dB	15 dB	-
Class A < 65 dB	Class B < 75 dB	-
Not applicable	Not applicable	-
< 2 kV	< 2 kV	< 2 kV
-	-	-
-	-	Resistant to impacts
DS: ≥ 0.30 R9	DS: ≥ 0.30 R9	-
0.042 m ² K/W Suitable	0.045 m ² K/W Suitable	0.018 m ² K/W Suitable
≥ 6	≥ 6	≥ 6
-	-	Phthalate free
-	-	Meets requirement
-	-	Extra washable
27 (Veneto) 8 (Style Emme) 1 (Style Elle) 3 (Etrusco) ON REQUEST: 10 (Trentino)	ON REQUEST: 60 (Veneto)	6



The above information is subject to modification for the benefit of further improvement. (02/17).

DISCLAIMER: Although the utmost care is taken, the data here given could differ and be subject to modifications from a technical point of view. In its strive to improve its floor solutions, Tarkett reserves the right to modify its technical specifications, colours and materials at any moment and without prior notice. Please, check the effective availability of the products presented at the time of order. Due to the technical limits of reproduction and printing techniques used, the appearance (colour) of the product may vary from the samples, panels or other visual display materials exhibited to the customer. It is mandatory to have the products installed properly if they are to be produced correctly and safely. Refer to Tarkett technical installation and maintenance directions, available at www.tarkett.com or at your Tarkett dealer.

*Elafono : 2,0mm traditional, 100% natural cork underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to 15dB, depending on the product). Available in rolls s32 x 2m.

SUSTAINABILITY

Tarkett was the first linoleum flooring manufacturer to be Cradle to Cradle® certified - underlining our strong commitment to sustainability.

Product certifications



Originale and Veneto Essenza 100% linen
All our linoleum ranges (except Silencio 18dB Linoleum, SD Static Dissipative x^{Fi}TM and Linoleum Conductive x^{Fi}TM ranges)
Silencio 18dB

International certifications



*Information sur le niveau d'émission de substances volatiles dans l'air extérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)



Factory certifications



All our linoleum products are eligible for LEED v4 credits. For more information: <http://www.c2ccertified.org/products/registry>

■ WESTERN EUROPE: Austria: Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 ■ Belgium: Tarkett Belux Sprl - Tel. +32 16 35 98 80 ■ Denmark: Tarkett A/S - Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy - Tel. +358 9 4257 9000 ■ France: Tarkett SAS - Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH, Bereich Objekt - Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. - Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA - Tel. +352 949 211 8804 ■ Netherlands: Tarkett Holding GmbH, Vestiging Nederland - Tel. +31 416 685 491 ■ Norway: Tarkett AS - Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA - Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L. - Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB - Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz - Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen - Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ Czech Republic: Tarkett France SAS, org. slozka - Tel. +420-271 001 602 ■ Hungary: Tarkett France SAS - Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o. o. - Tel. +48 22 16 09 231 ■ Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737 ■ Slovakia: Tarkett France SAS, org. zlozka - Tel. +421 248 291 317 ■ South East Europe: Tarkett SEE - Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA - Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited - Tel. +852 2511 8716 ■ India: Tarkett France (India Branch) - Tel. +91 11 4352 4073 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. - Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonite - Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. - Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett - Tel. 55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ Mexico / Central America: Tarkett Latam Mexico - Tel. +55 11 98410 9310

CUSTOMS TARIFF: 482050000000